



Side Link installation

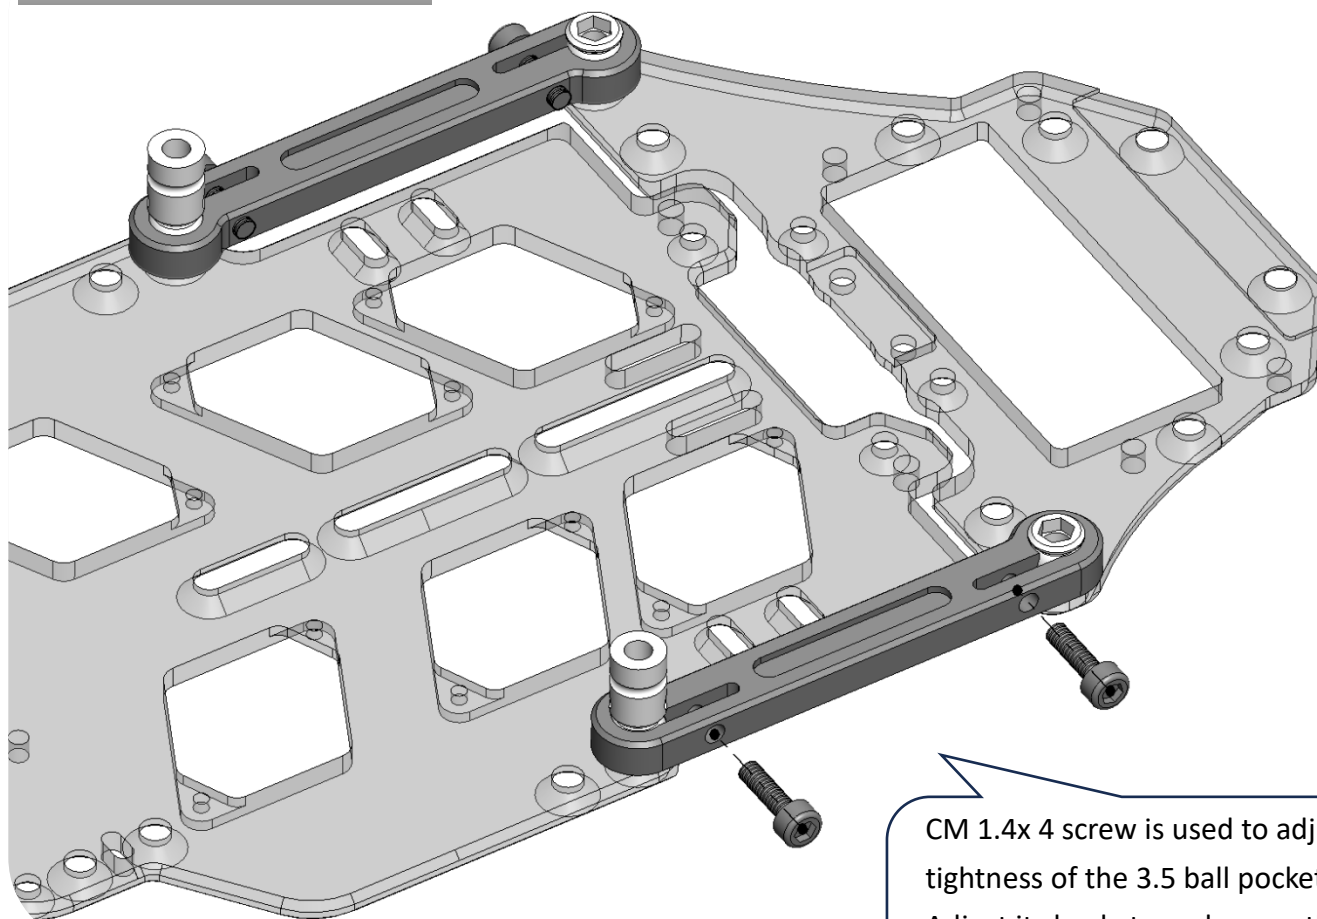

CM 1.4x 4 screw is used to adjust the tightness of the 3.5 ball pocket. Adjust it slowly to make sure the slop is as less as possible, and the 3.5 ball still can move smoothly

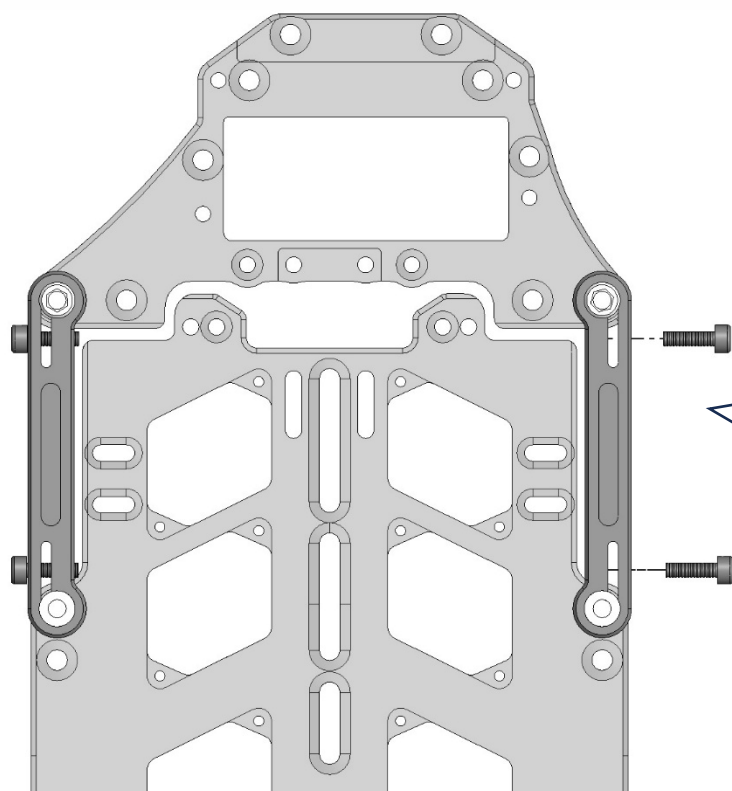

Note:

CM 1.4x 4 screw must fix from the “thin side” of the side link.