



AWD218

I.A.S Inboard adjustable Suspension. (MA-010/015)

www.rcatomic.com

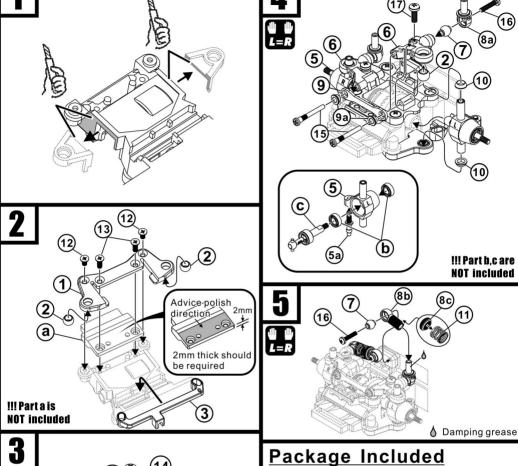



Lower Front Arm	X 1
Privot Ball (Ø4.7)	x 5
Tire Rod (0°)	x 1

- 4. Front Bulk Cover

- 5. Steering Knuckle-L,R(0°) x 1pair
- 5a.Privot Ball Pin x 2
- 6. Upper Arm-L,R x 1 pair
- 7. Pivot ball (Ø4) x 5

9. Graphite Tower Bar 9a.Collar

13.M2 x 6 KB Screw 14.M2 x 6 PB Screw 15.M1.7 x 14 PB Screw

16.M1.5 x 9 PB Screw 17.M2 x 6 PM Screw

10.Cone Collar

11.Spring Set 12.M2 x 4 KB Screw

- 8a.Grease Shock (A) x 2
- 8b.Grease Shock (B) x 2 8c. Grease Shock (C)
 - x 2

 - x 2 x 2
 - x 2
 - x 2 x 2

 - x 3